
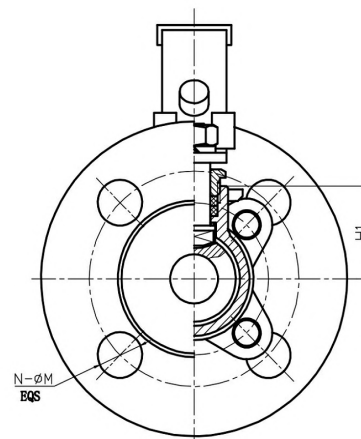



352 F 3-tlg. Flansch-Kugelhahn, voller Durchgang, V4A / 3-pc. Flange - Ball Valve, full port

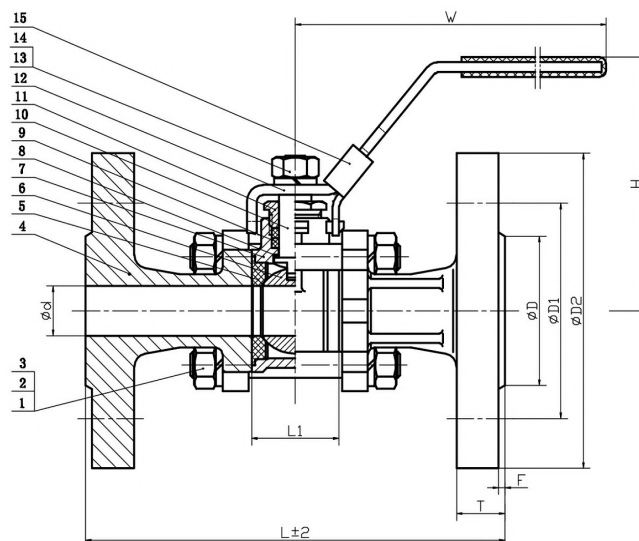

15	Handle Lock	A276 201
14	Spring Washer	A276 304
13	Nut	A194-8
12	Handle	A276 201
11	Packing Gland	A276 304
10	Stem	A276 316
9	Packing	PTFE
8	Stem Gasket	PTFE
7	Body	A351 CF8M
6	Ball	SS316
5	Seat	PTFE
4	Bonnet	A351 CF8M
3	Nut	A194-8
2	Spring Washer	A276 304
1	Bolt	A193-B8
No.	Parts name	Material

SIZE	Ød	L	L1	W	ØD	ØD1	ØD2	T	F	N-ØM	H	H1
1/2	15	130	27	160	45	65	95	15	2	4-Ø14	76	28
3/4	20	150	32	160	58	75	105	17	2	4-Ø14	83	30.5
1	25	160	37	180	68	85	115	17	2	4-Ø14	91	39
1 1/4	32	180	46	200	78	100	140	18	2	4-Ø18	104	44
1 1/2	38	200	54	220	88	110	150	18	3	4-Ø18	111	54
2	48	230	67	220	102	125	165	20	3	4-Ø18	120	63
2 1/2	65	290	85	280	122	145	185	18	3	4-Ø18	145	80.5
3	78	310	99	280	138	160	200	20	3	8-Ø18	155	91
4	100	350	130	300	158	180	220	20	3	8-Ø18	168	107.5

PRESSURE-TEMPERATURE RATING

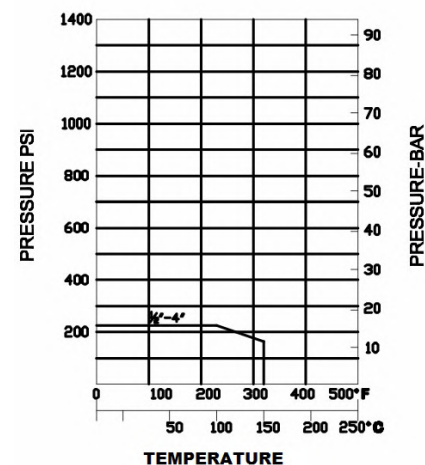

TECHNICAL SPECIFICATION

1. Basic design and manufacture acc. ANSI B16.34
2. Face-to-face dimensions complied with DIN 3202-F1;
3. Flange dimensions complied with DIN 2633;
4. Inspection and tested according to API 598

Main Technical Parameter			
Normal pressure		1.6	Mpa
Test pressure	Shell test pressure	2.4	MPa
	Tightness test	1.8	
	Gas-Tightness test	0.6	
Max working temperature		-20~150	°C
Applicable medium: water, gas, oil, acid			

RO-FI / N352F (352F) 2020-05/ F