


311 A/S


Verschraubung flach dichtend Außengewinde/Schweißende, 1.4401 / AISI 316

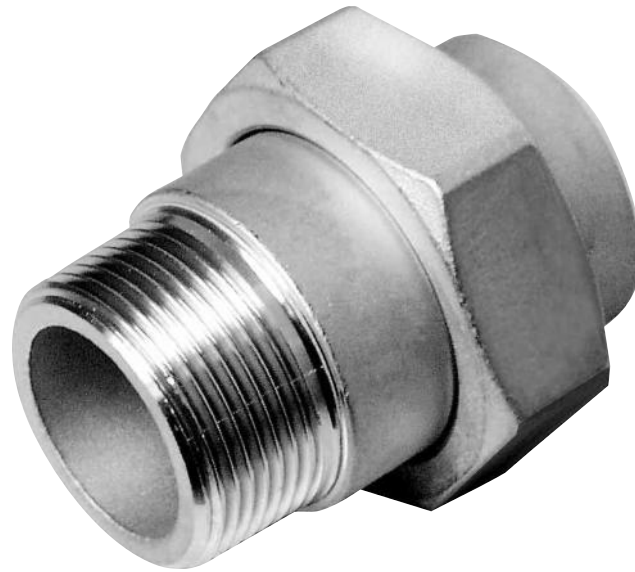

www.rofi.de

Gewinde R-EN 10226 (alt DIN 2999)
inkl. Dichtung-PTFE

NW	d2	d1	L	SW	kg
8	13,5 mm	1/4"	52 mm	34 mm	0,14
10	17,2 mm	3/8"	50 mm	34 mm	0,15
15	21,3 mm	1/2"	55 mm	38 mm	0,21
20	26,9 mm	3/4"	62 mm	42 mm	0,29
25	33,7 mm	1"	65 mm	49 mm	0,39
32	42,4 mm	1 1/4"	74 mm	60 mm	0,58
40	48,3 mm	1 1/2"	86 mm	70 mm	0,86
50	60,3 mm	2"	92 mm	77 mm	1,44
65	76,1 mm	2 1/2"	115 mm	109 mm	1,99
80	88,9 mm	3"	123 mm	125 mm	2,60

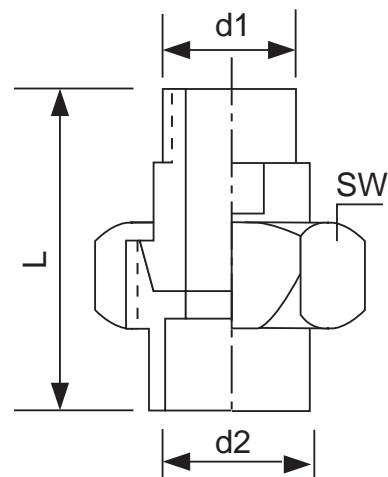

Verschraubungen in
gedrehter Ausführung
auf Anfrage