


311 I/S

Verschraubung flach dichtend Innengewinde/Schweißende, 1.4401 / AISI 316



Gewinde Rp-EN 10226 (alt DIN 2999)  
inkl. Dichtung-PTFE

NW	d1	d2	L	SW	kg
8	13,5 mm	1/4"	38,0 mm	31 mm	0,08
10	17,2 mm	3/8"	38,0 mm	34 mm	0,13
15	21,3 mm	1/2"	44,0 mm	38 mm	0,15
20	26,9 mm	3/4"	46,0 mm	42 mm	0,21
25	33,7 mm	1"	48,0 mm	50 mm	0,29
32	42,4 mm	1 1/4"	53,0 mm	60 mm	0,42
40	48,3 mm	1 1/2"	63,0 mm	70 mm	0,56
50	60,3 mm	2"	69,0 mm	77 mm	0,68
65	76,1 mm	2 1/2"	87,0 mm	110 mm	1,43
80	88,9 mm	3"	89,0 mm	125 mm	2,60

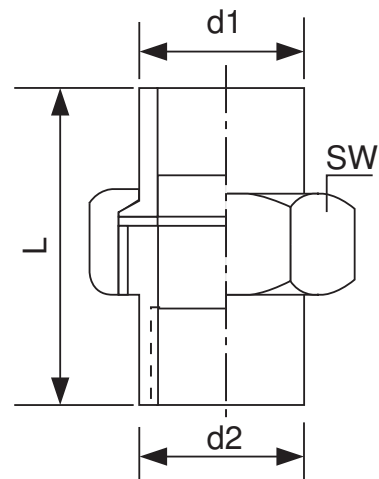

Verschraubungen in  
gedrehter Ausführung  
auf Anfrage