


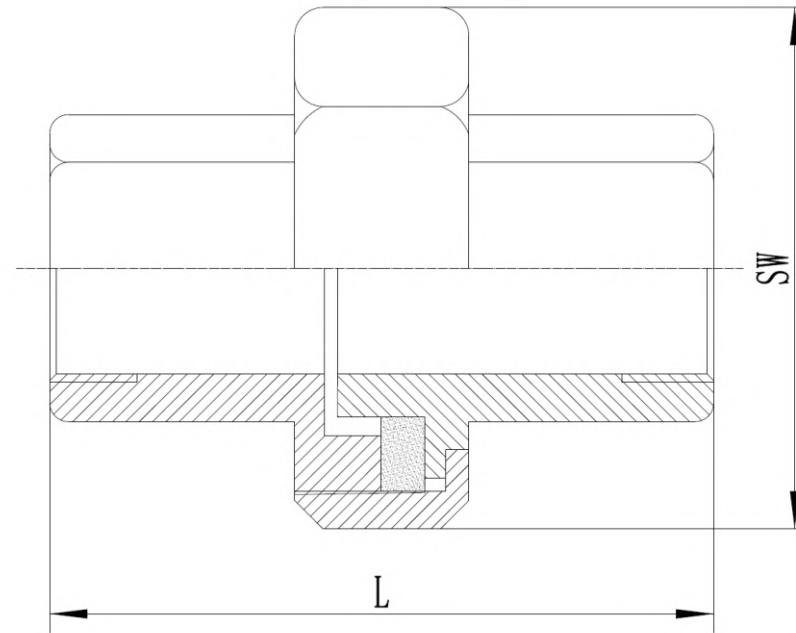

311 Verschraubung flach dichtend, Innen-/Innengewinde Union flat seat, female / female thread, V4A/316

Dimension	L	SW
1/8"	24,0	25,0
1/4"	31,0	26,5
3/8"	32,0	31,0
1/2"	36,0	37,5
3/4"	43,2	46,0
1"	47,0	51,0
1 1/4"	51,0	63,0
1 1/2"	54,9	71,0
2"	64,0	83,5
2 1/2"	70,1	104,8
3"	82,6	116,8
4"	88,5	142,0

Toleranz +/- 1,0 mm

RO-FI / 311 (E313) 2019-12 / F



Gewinde Rp-EN 10226 (alt DIN 2982)
inkl. Dichtung-PTFE

NW	d1	L	SW	kg
6	1/8"	31,0 mm	25 mm	0,07
8	1/4"	34,0 mm	31 mm	0,09
10	3/8"	39,0 mm	37 mm	0,14
15	1/2"	36,5 mm	42 mm	0,14
20	3/4"	42,0 mm	49 mm	0,20
25	1"	45,5 mm	59 mm	0,29
32	1 1/4"	52,0 mm	69 mm	0,41
40	1 1/2"	55,0 mm	78 mm	0,54
50	2"	61,0 mm	93 mm	0,81
65	2 1/2"	70,0 mm	112 mm	1,69
80	3"	78,0 mm	127 mm	2,50

