


ECO-leichte Ausführung

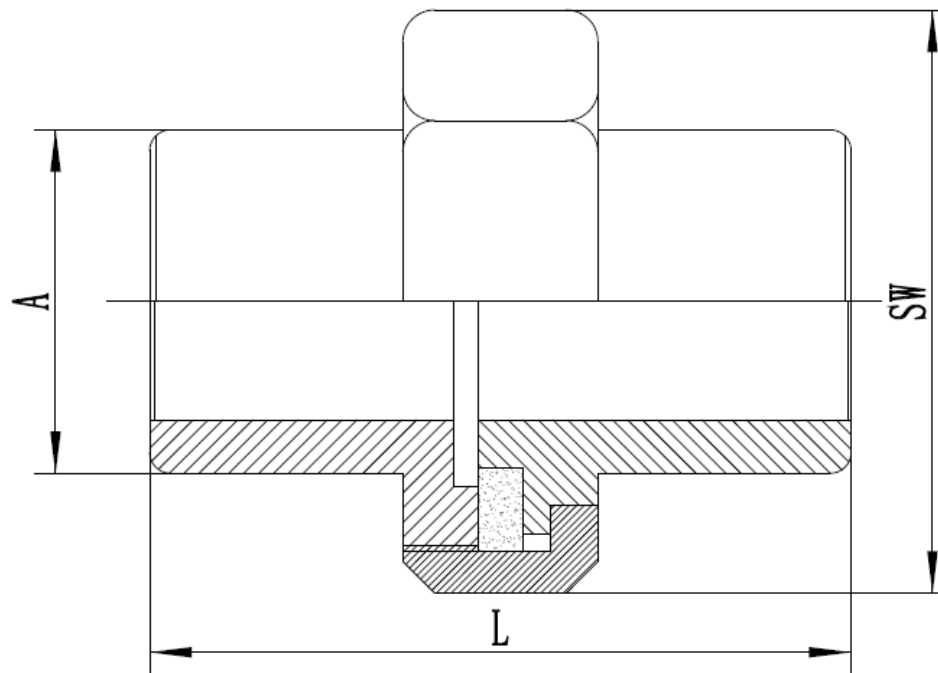

311S Verschraubung flach dichtend, Schweißenden Union flat seat, butt weld ends, V4A/316

Dimension	L	SW	A
1/8"	24,3	25,0	10,2
1/4"	31,0	26,5	13,5
3/8"	32,0	31,0	17,2
1/2"	36,2	37,5	21,3
3/4"	42,9	46,0	26,9
1"	46,7	51,0	33,7
1 1/4"	50,7	63,0	42,4
1 1/2"	56,5	71,0	48,3
2"	63,4	83,5	60,3
2 1/2"	68,3	104,8	76,1
3"	81,2	116,8	88,9
4"	88,5	142,0	114,3

Toleranz +/- 1,0 mm

RO-FI / 311S (E315) 2019-12 F

311 S


Verschraubung flach dichtend Anschweißenden, 1.4401 / AISI 316



www.rofi.de

inkl. PTFE-Dichtung

NW	d1	L	SW	kg
6	10,2 mm	39 mm	25 mm	0,10
8	13,5 mm	39 mm	25 mm	0,14
10	17,2 mm	40 mm	34 mm	0,15
15	21,3 mm	41 mm	38 mm	0,20
20	26,9 mm	46 mm	42 mm	0,29
25	33,7 mm	49 mm	50 mm	0,42
32	42,4 mm	53 mm	60 mm	0,67
40	48,3 mm	68 mm	70 mm	0,82
50	60,3 mm	75 mm	77 mm	1,20
65	76,1 mm	85 mm	110 mm	1,87
80	88,9 mm	91 mm	126 mm	2,30

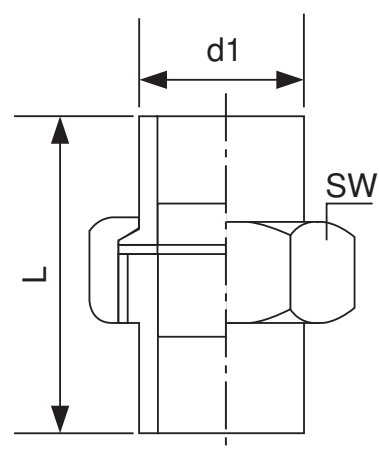

Verschraubungen in
gedrehter Ausführung
auf Anfrage