


ECO-leichte Ausführung

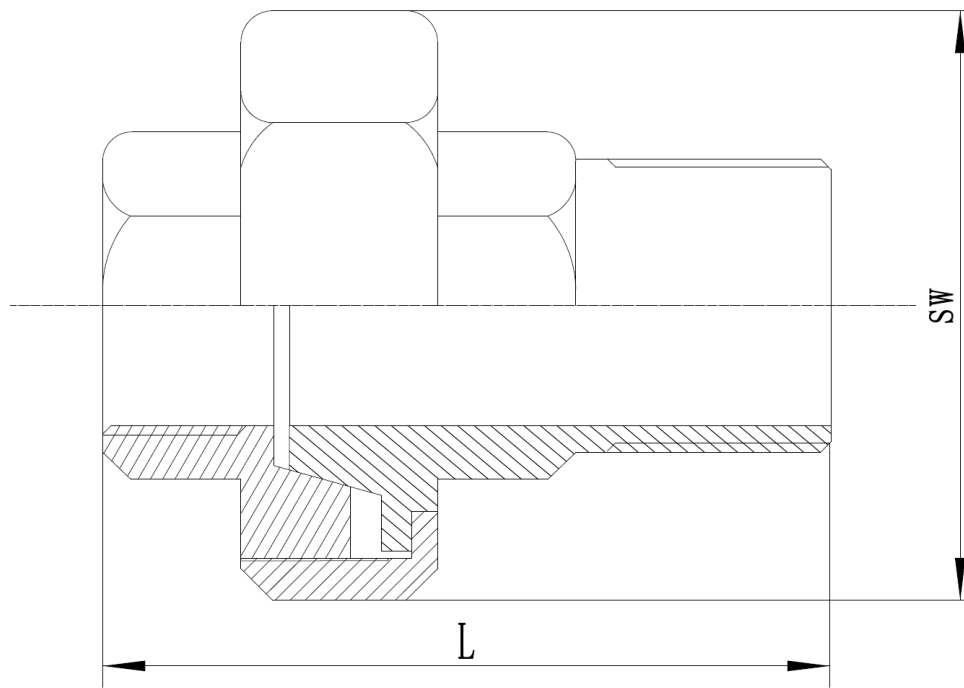


**312A Verschraubung konisch dichtend, Innen-/Außengewinde  
Union conical seat, female / male thread, V4A/316**

Dimension	L	SW
1/8"	30,5	25,0
1/4"	40,0	26,5
3/8"	41,0	31,0
1/2"	46,5	37,5
3/4"	52,5	46,0
1"	60,0	51,0
1 1/4"	65,0	63,0
1 1/2"	74,1	71,0
2"	76,2	83,5
2 1/2"	90,8	104,8
3"	104,5	116,8
4"	115,9	142,0

Toleranz +/- 1,0 mm

RO-FI / 312A (E317) 2019-12 / F

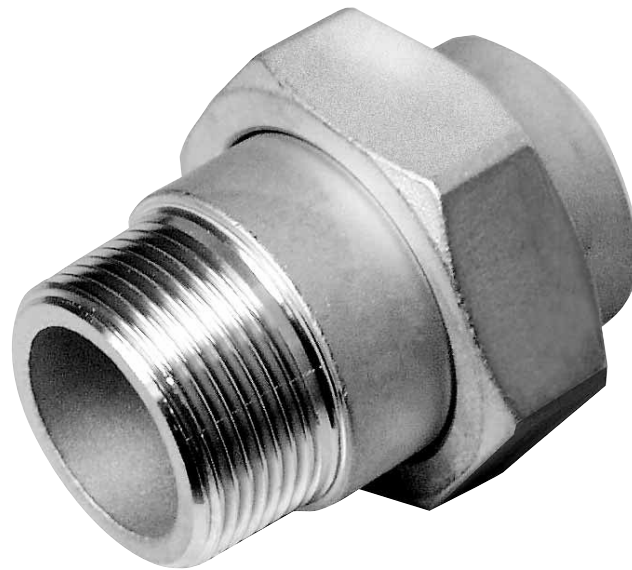

Gewinde Rp x R-EN 10226 (alt DIN 2999)

NW	d1/d2	L	SW	kg
8	1/4"	43,0mm	31 mm	0,14
10	3/8"	49,0	37 mm	0,19
15	1/2"	50,5 mm	42 mm	0,20
20	3/4"	57,0 mm	49 mm	0,29
25	1"	63,0 mm	59 mm	0,43
32	1 1/4"	70,5 mm	69 mm	0,57
40	1 1/2"	74,5 mm	78 mm	0,80
50	2"	83,5 mm	93 mm	1,20
65	2 1/2"	86,0 mm	112 mm	1,83
80	3"	106,5 mm	126 mm	3,02

