


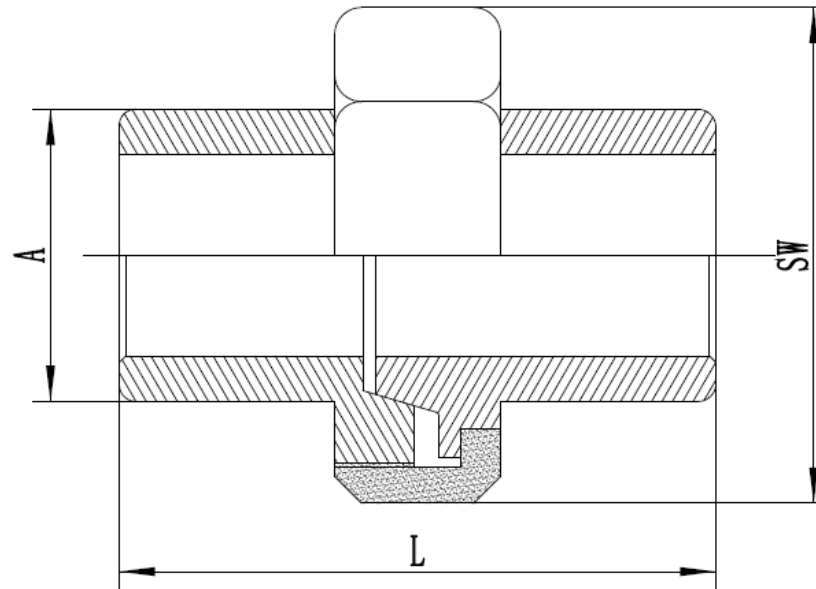

## 312S Verschraubung konisch dichtend, Schweißenden / Union conical seat, butt weld ends, V4A/316

| Dimension | L    | SW    | A     |
|-----------|------|-------|-------|
| 1/8"      | 24,3 | 25,0  | 10,2  |
| 1/4"      | 31,0 | 26,5  | 13,5  |
| 3/8"      | 32,0 | 31,0  | 17,2  |
| 1/2"      | 36,2 | 37,5  | 21,3  |
| 3/4"      | 42,9 | 46,0  | 26,9  |
| 1"        | 46,7 | 51,0  | 33,7  |
| 1 1/4"    | 50,7 | 63,0  | 42,4  |
| 1 1/2"    | 56,5 | 71,0  | 48,3  |
| 2"        | 63,4 | 83,5  | 60,3  |
| 2 1/2"    | 68,3 | 104,8 | 76,1  |
| 3"        | 81,2 | 116,8 | 88,9  |
| 4"        | 88,5 | 142,0 | 114,3 |

Toleranz +/- 1,0 mm

RO-FI / 312S (E318) / 2019-12 / F

312 S

Verschraubung konisch dichtend Anschweißenden, 1.4401 / AISI 316



| NW | d1      | L     | SW     | kg   |
|----|---------|-------|--------|------|
| 6  | 10,2 mm | 39 mm | 25 mm  | 0,10 |
| 8  | 13,5 mm | 39 mm | 25 mm  | 0,14 |
| 10 | 17,2 mm | 40 mm | 34 mm  | 0,14 |
| 15 | 21,3 mm | 41 mm | 38 mm  | 0,19 |
| 20 | 26,9 mm | 46 mm | 42 mm  | 0,23 |
| 25 | 33,7 mm | 49 mm | 50 mm  | 0,32 |
| 32 | 42,4 mm | 53 mm | 60 mm  | 0,51 |
| 40 | 48,3 mm | 68 mm | 70 mm  | 0,79 |
| 50 | 60,3 mm | 75 mm | 77 mm  | 0,93 |
| 65 | 76,1 mm | 85 mm | 110 mm | 2,10 |
| 80 | 88,9 mm | 91 mm | 126 mm | 2,80 |

