


ECO-leichte Ausführung

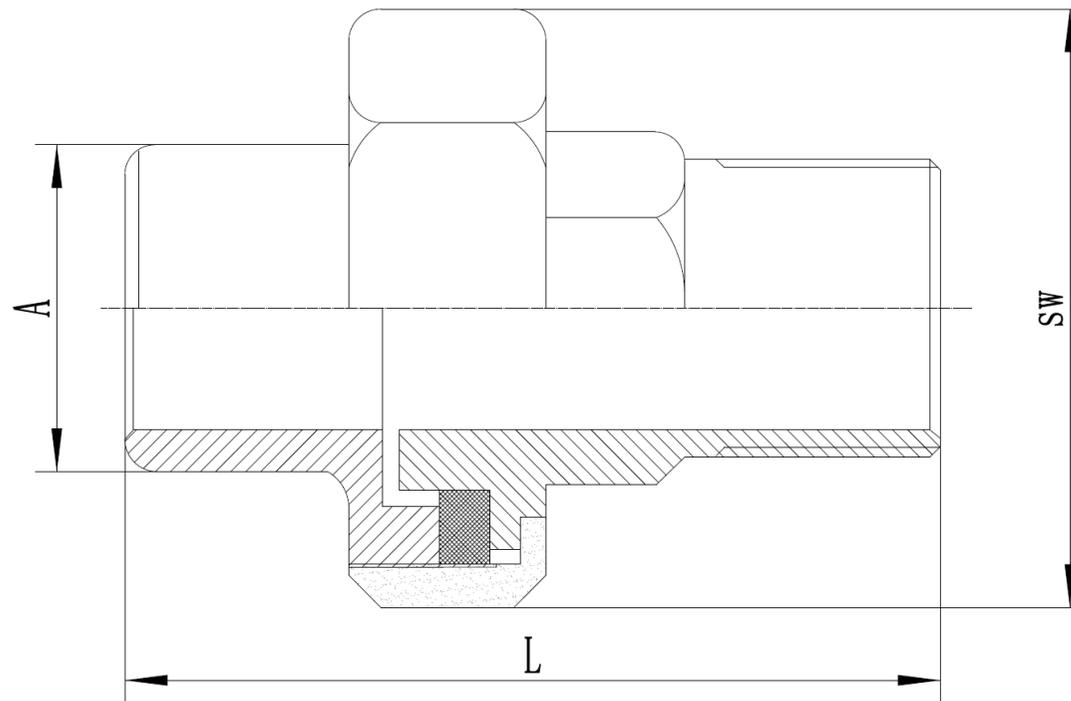

311AS Verschraubung flach dichtend, Außengewinde/Schweißende Union flat seat, male/butt weld end, V4A/316

Dimension	L	SW
1/8"	30,5	25,0
1/4"	40,0	26,5
3/8"	41,0	31,0
1/2"	46,5	37,5
3/4"	53,8	46,0
1"	60,0	51,0
1 1/4"	65,0	63,0
1 1/2"	74,7	71,0
2"	75,2	83,5
2 1/2"	89,9	104,8
3"	103,8	116,8
4"	115,9	142,0

Toleranz +/- 1,0 mm

RO-FI / 311AS (E319) 2019-12 / F